

VANDAELE[®]

CLIPPER



VANDAELE CLIPPER

GAIN GROUND BY MAINTAINING YOUR VERGES!



Teleflex cable control



ELECTRO-PROPORTIONAL JOYSTICK

Hydraulic safety system for obstacle detection



Bushings at each pivot point for improved durability.



Robust bolted tank, suitable for mineral or biodegradable oil, with integrated filter and sight glass for efficient monitoring

Featuring a three-point hitch (Cat. I & II) and tailor-made stabilizers upon request.

Dual pump

Includes a nitrogen accumulator with integrated shut-off valve for added safety and control.

Cage rotor with hammers or flail rotor



Optional :

- » Electric oil cooler
- » Shut-off valves make tool changes quick, safe, and spill-free.
- » LED traffic lighting
- » Electronic ALC level control
- » Electronic AFC lift system






CLIPPER	2-35	2-45	3-50	3-60
Hitch	Front or rear linkage mounting (Cat. I and II)			
Stabilizers	Custom-made (on request)			
Minimum tractor weight (kg)	1300	1800	2800	3200
PTO speed	540 rpm (1,000 rpm front PTO)			
Rotor power (hp)	25 HP		40 HP	
Rotor width (m)	0.80 / 1.00 / 1.20 m		1.25	
Flail rotor, cutting capacity (mm)	Double Y flails or J flail, max. Ø 25 mm			
Rotor with hammers, cutting capacity (mm)	Not available		Max. Ø 60	
Hedge trimmer	1.20 m or 1.65 m, max. capacity Ø 25 mm			
Branch cutter	1.50 m / Ø 50 mm		1,50 or 2,00 m / Ø 50 mm	
Branch cutter	Not available		1,50 or 2,20 m / max. Ø 110 mm	
Branch saw	3 blades of Ø 500 mm		3 blades of Ø 700 mm	
Horizontal reach (m)*	3.65	4.80	5.50	6.20
Reach along a downward slope (m)*	2.40	3.40	4.10	4.80
Vertical reach (m)*	4.25	5.25	6.00	6.70
Reach over hedge (m)*	1.95	2.45	3.00	3.35
Minimum lateral reach (m)*	1.35		1.10	
Oil tank capacity (L)	60		120	
Weight (kg)	570	600	780	795

*Dimensions may vary depending on the tractor; figures are non-binding.



VANDAELE®

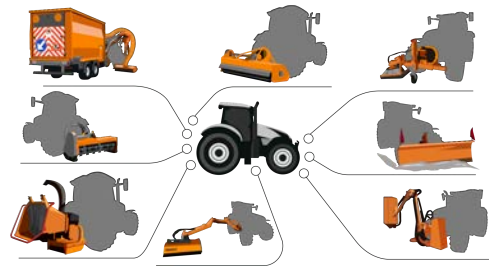

CONTACT



+32 56 66 45 01



Stationsstraat 119, 8780 Oostrozebeke, Belgium



info@vandaele.biz



www.vandaele.biz



CLIPPER
